



Ring Power



RENTAL PRODUCT GUIDE 2025









TABLE OF CONTENTS

CAT RENTAL STORE REI	NTAL FLEET		1
Mini Excavators	Vibratory Plates 2 Sweepers 3 AG Tractors 3 Boom Mower 3 Broom 3 Welders 3 Telehandlers 3 Rotating Telehandlers 3 SkyTrak 3 Rough Terrain Forklifts 3 Industrial Forklifts 4 Straight Boom Lifts 4 Track Straight Boom Lifts 4	Electric Articulating Boom Lifts	Crash Attenuator Trucks 5 Message Board 5 Arrow Board 6 Security Tower 6 All-Terrain Vehicles 6 Air Compressors 6 Trailer Mounted Centrifugal 6 Light Towers 6 Water Trailers 6 Trailers 6 Attachments 7 Location & Phone Numbers 8
Rollers2 HEAVY EQUIPMENT RE	Articulating Boom Lift 4	Off-Road Water Trucks 5	9
Medium Dozers	Wheeled Excavators	On-Road Water Trucks10Off-Road Water Trucks10Tractor Scraper10Pavers11Road Wideners11Remixing Transfer Vehicles11	Soil Mixers/Reclaimers 11 Sweepers 11 Air Burners 11 Locations & Phone Numbers 12
Vacuum Trucks	Rear Easement Derricks	Work Trucks	13
POWER SYSTEMS REN	TAL FLEET		15
Portable Generators	Air Conditioners	Amperage Chart	
COMPRESSED AIR REN	TAL FLEET		19
Portable Diesel Air Compressors	Industrial Air Compressors	Pressure Loss in Air Hoses Chart	
LIFT TRUCKS RENTAL F	LEET		22
Large IC Pneumatic Tire Forklifts	P. IC Pneumatic Tire Forklifts	Electric Order Pickers & Dock Stockers23 Electric Straddle/ Walkie Stackers23 Electric Pallet Movers	Floor Cleaners 23 RailCar Movers 23 Side Loaders 23 Locations & Phone Numbers 24
CRANE RENTAL FLEET			25
Crawler Cranes	8	Boom Trucks	Locations & Phone Numbers 26

PHONE DIRECTORY

CAT RENTAL STORE LOCATIONS & PHONE NUMBERS

Brooksville	. 352.797.9500	Ocala352.	.620.0660	Tallahassee
Daytona Beach	. 386.947.4939	Orlando407.	.856.4851	Tampa813.671.3200
Gainesville	. 352.387.7368	Palm Bay321.	.725.6420	Titusville
Jacksonville	.904.714.3517	Sarasota941.	.359.6050	Leesburg
Lake City	. 386.961.0392	St. Augustine904.	.494.7464	
Lakeland	.863.286.3836	St. Petersburg727.	.471.2151	

HEAVY EQUIPMENT RENTAL LOCATIONS & PHONE NUMBERS

TALLAHASSEE | PERRY | LAKE CITY | GAINESVILLE OCALA | JACKSONVILLE | ST. AUGUSTINE

904.737.7730 ext. 1284

BROOKSVILLE | LAKELAND | TAMPA | SARASOTA 813 671 3700 ext 8111 DAYTONA | ORLANDO | PALM BAY 407.855.6195 ext. 3202

UTILITY EQUIPMENT RENTAL LOCATIONS & PHONE NUMBERS

JACKSONVILLE | ST. AUGUSTINE | ORLANDO | OCALA | TALLAHASSEE | LAKELAND | TAMPA | POMPANO 844.766.7368

POWER SYSTEMS RENTAL LOCATIONS & PHONE NUMBERS

TALLAHASSEE | PERRY | LAKE CITY | GAINESVILLE JACKSONVILLE | ST. AUGUSTINE 904.494.1242

OCALA | BROOKSVILLE | LAKELAND | TAMPA SARASOTA 813.865.2518 DAYTONA | ORLANDO | PALM BAY 407.472.6235

COMPRESSED AIR RENTAL LOCATIONS & PHONE NUMBERS

NORTH FLORIDA 904.237.2372 | 850.251.0019 WEST CENTRAL FLORIDA 813.781.7093 | 813.240.0915 EAST CENTRAL FLORIDA 407.202.5702

SOUTH FLORIDA 561.221.4608 | 561.756.1651

LIFT TRUCKS RENTAL LOCATIONS & PHONE NUMBERS

JACKSONVILLE | TALLAHASSEE | ST AUGUSTINE 904.448.5438

TAMPA | ST. PETERSBURG | SARASOTA | LAKELAND 727.471.2150 ORLANDO | OCALA | DAYTONA | BREVARD 407.857.1973

CRANE RENTAL LOCATIONS & PHONE NUMBERS



RENTIT HERE.

Newest Fleet in the Industry.



CAT® MINI EXCAVATORS



301.7 21 HP 3,900 lbs. op. wt. Max. 7'11" depth/12'9" reach 301.8 21 HP 4,450 lbs. op. wt. Max. 8'5" depth/13'2" reach 302 21 HP 4,800 lbs. op. wt. Max. 8'6" depth/13'9" reach
,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,
302 21 HP 4,800 lbs. op. wt. Max. 8'6" depth/13'9" reach
303E CR 24 HP 7,400 lbs. op. wt. Max. 9'0" depth/16'3" reach
303.5E2 CR 24 HP 8,200 lbs. op. wt. Max. 10'4" depth/17'5" reach
304 CR 40 HP 9,000 lbs. op. wt. Max. 11'3" depth/18'4" reach
305 CR 40 HP 11,500 lbs. op. wt. Max. 12' depth/19'1" reach
306 CR 56 HP 15,800 lbs. op. wt. Max. 13'6" depth/21'11" reach
307.5 58 HP 18,150 lbs. op. wt. Max. 15'3" depth/22'4" reach
308 CR OOM 70 HP 20,100 lbs. op. wt. Max. 15'5" depth/24'9" reach
309 CR 70 HP 21,100 lbs. op. wt. Max. 15'1" depth/25' reach
310 70 HP 22,500 lbs. op. wt. Max. 17'1" depth/25' reach

Other available attachments include: Thumb, hammer, auger, plate compactor & ditch bucket

MINI EXCAVATORS WITH MULCHER HEAD

308 CR	70 HP	20,100 lbs. op. wt.	Max. 15'5" depth/24'9" reach
309 CR	70 HP	21,100 lbs. op. wt.	Max. 15'1" depth/25' reach

CAT® SMALL EXCAVATORS



311 RR	70 HP	30,600 lbs. op. wt.	Max. 18'4" depth/26'7" reach
313	74 HP	29,300 lbs. op. wt.	Max. 19'9" depth/28'3" reach
315 CR	97 HP	34,000 lbs. op. wt.	Max. 19'6" depth/28'6" reach
317	130 HP	38,900 lbs. op. wt.	Max. 19'11" depth/28'9" reach
320	153 HP	56,500 lbs. op. wt.	Max. 24'10" depth/35' reach
323	161 HP	51,500 lbs. op. wt.	Max. 24'10" depth/35' reach

Other available attachments include: Thumb, hammer & ditch bucket

CAT® SMALL DOZERS



D1 LGP	80 HP	19,000 lbs. op. wt.	6-Way Blade		
D3 LGP	104 HP	22,000 lbs. op. wt.	6-Way Blade		
Available attachments include: GPS, Laser AccuGrade TM .					
D1 MULCHER	104 HP	24,300 lbs. op. wt.	6-Way Blade		

Equipped with Cat HM518 mulching head, a closed loop hydrostatic circuit, $72^{\prime\prime}$ cutting width and $25^{\prime\prime}$ triple grouser tracks.

CAT® BACKHOE LOADERS



420F2/IT 93 HP 24,500 lbs. op. wt. Std. depth 14'4"/E-Stick 17'11"

Available attachments include: Ditch buckets, forks, E-Sticks, hydraulic hammers. Backhoe bucket sizes: 12" to 36" Fork length: 48"

CAT® COMPACT WHEEL LOADERS



Based on Straight Load with bucket attached.

903D	40 HP	9,200 lbs. op. wt.	5,440 lbs tip load/2,720 lbs capacity
906	68 HP	12,500 lbs. op. wt.	9,200 lbs tip load/4,600 lbs capacity
908	68 HP	14,300 lbs. op. wt.	10,200 lbs tip load/5,100 lbs capacity

Available attachments include: Booms, buckets, forks, material handling arms, rakes.

CAT® SMALL WHEEL LOADERS



Based on Straight Load with bucket attached.

914M	92 HP	18,200 lbs. op. wt.	12,450 lbs tip load/6,225 lbs capacity
920	120 HP	23,400 lbs. op. wt.	15,382 lbs tip load/7,691 lbs capacity
926M	146 HP	28,500 lbs. op. wt.	19,380 lbs tip load/9,690 lbs capacity
930M	164 HP	31,000 lbs. op. wt.	21,900 lbs tip load/10,950 lbs capacity

CAT® COMPACT TRACK LOADERS



239D3	67 HP	7,400 lbs. op. wt.	4,100 lbs. tip load/2,050 lbs. capacity
249D3*	67 HP	7,800 lbs. op. wt.	4,600 lbs. tip load/2,300 lbs. capacity
259D3***	73 HP	8,900 lbs. op. wt.	5,800 lbs. tip load/2,900 lbs. capacity
279D3**	73 HP	9,900 lbs. op. wt.	5,870 lbs. tip load/2,935 lbs. capacity
289D3***	73 HP	10,800 lbs. op. wt.	7,600 lbs. tip load/3,800 lbs. capacity
299D3***	95 HP	10,800 lbs. op. wt.	8,500 lbs. tip load/4,250 lbs. capacity
299D3 XHP*	106 HP	11,800 lbs. op. wt.	9,100 lbs. tip load/4,550 lbs. capacity

NEW CAT® NEXT GEN CTLs



255	73 HP	9,600 lbs. op. wt.	7,140 lbs. tip load/3,570 lbs. capacity
265	73 HP	10,500 lbs. op. wt.	8,066 lbs. tip load/4,033 lbs. capacity





RT-40	37 HP	4.175 lbs. op. wt.	2,660 lbs. tip load/1,300 lbs. capacity
111-40	0/111	T, 1 / J 103. Up. Wt.	2,000 ibs. tip ibau/ 1,000 ibs. capacity

WACKER NEUSON TRACK LOADER



SM100 24.7 horse power 35.5" width 3,300 lbs. op. wt.



CAT® SKID STEER LOADERS



			The second secon
226D3	56 HP	6,000 lbs. op. wt.	3,000 lbs. tip load/1,500 lbs. capacity
242D3*	73 HP	7,000 lbs. op. wt.	4,300 lbs. tip load/2,150 lbs. capacity
246D3**	73 HP	7,500 lbs. op. wt.	4,300 lbs. tip load/2,150 lbs. capacity
262D3***	73 HP	8,100 lbs. op. wt.	5,400 lbs. tip load/2,700 lbs. capacity
*Vert Lift **Hi-Flow *** Vert Lift/Hi-Flow			

Available attachments include: Sod rollers, cold planers, trenchers, vibratory compactors, forks, grapples, augers, brooms, hammers, brush cutters. Solid tires also available.

CAT® SOIL COMPACTORS



CS34*	74 HP	50" drum	9,900 lbs. op. wt.
CS44B*	100 HP	66" drum	15,300 lbs. op. wt.

*Vibratory Soil

CAT® ASPHALT COMPACTORS



				-
CB1.7*	25 HP	35" drum	3,538 lbs. op. wt.	
CB1.8*	25 HP	39" drum	3,825 lbs. op. wt.	
CB2.7 GC*	25 HP	47" drum	5,936 lbs. op. wt.	
CB2.7*	31 HP	47" drum	6,808 lbs. op. wt.	

*Double Drum

WEILER MOTOR GRADERS



65E 120 HP 17,000 lbs. op. wt. 10' moldboard



VERMEER® TRENCHERS



RTX-250	36" Walk-Behind Trencher	25 hp	1,550 lbs. op. wt.
RTX-450	48" Ride-On Trencher	49 hp	4,507 lbs. op. wt.



WACKER NEUSON ROLLERS



RD12L-90	3,400 lbf. centr. force	35.4" width	2,288 lbs. op. wt.
RTLx-SC3	3,295 lbf. centr. force	32" width	3,295 lbs. op. wt.



WACKER NEUSON VIBRATORY PLATES



BPU4045A	8,992 lbf. centr. force	17.7" width	710 lbs. op. wt.
BPU5545A	12,346 lbf. centr. force	23.8" width	750 lbs. op. wt.
BPU3050A	6,744 lbf. centr. force	19.7" width	366 lbs. op. wt.



LAYMOR SWEEPERS



SM3003-WHEEL 25 HP 96" brush 3,100 lbs.

LAY·MOR

AG TRACTORS




MF5711	110 HP	85 PTO	18,700 lbs. op. wt.
MF5712	120 HP	95 PTO	18,700 lbs. op. wt.
MF7715	155 HP	120 PTO	27,500 lbs. op. wt.
MF7722	215 HP	165 PTO	30,800 lbs. op. wt.
MF8732	320 HP	250 PTO	40,000 lbs. op. wt.

MASSEY FERGUSON

BOOM MOWER



MF7S 155 HP 120 PTO 25' boom mower



BROOM



MF4607M 70 HP 56 PTO 7,000 lbs. op. wt.

Equipped with Smith broom attachment



ENGINE DRIVEN WELDER



 Big Blue 400
 950 lbs.
 20 A-400 A Amperage
 400 A at 24 V, 100% Duty Cycle, 350 A at 27 V, 100% Duty Cycle, 300 A at 32 V, 100% Duty Cycle



BOOM LIFT WELDER



CST 282 34.6 lbs. 50/60 Input Hz 280 A at 31.2 VDC, 35% Duty Cycle



CAT® TELEHANDLERS



TH255C	11,000 lbs. op. wt.	5,500 lbs. capacity	18' lift height
TL642D	23,600 lbs. op. wt.	6,500 lbs. capacity	42' lift height
TL943D	27,000 lbs. op. wt.	9,000 lbs. capacity	43' lift height
TL1055D	34,900 lbs. op. wt.	10,000 lbs. capacity.	55' lift height
TL1255D	39,200 lbs. op. wt.	12,000 lbs. capacity	55' lift height

Available attachments include: Buckets, pallet forks, block forks, framer's carriages, truss booms, lifting hooks.

GENIE TELEHANDLERS



GTH-5519	10,900 lbs. op. wt.	5,500 lbs. capacity	19' lift height
GTH-844	22,600 lbs. op. wt.	8,000 lbs. capacity	44' lift height
GTH-1056	30,000 lbs. op. wt.	10,000 lbs. capacity	56' lift height



ROTATING TELEHANDLERS



RTH 6.25	39,680 lbs. op. wt.	13,200 lbs. capacity	82' lift height
RTH 6.30	48,060 lbs. op. wt.	13,200 lbs. capacity	97'9" lift height



SKYTRAK



6042	25,100 lbs. op. wt.	6,000 lbs. capacity	42' lift height
10054	28,200 lbs. op. wt.	10,000 lbs. capacity	53' lift height
1644	33,700 lbs. op. wt.	15,650 lbs. capacity	44' lift height
2733	38,775 lbs. op. wt.	26,600 lbs. capacity	33' lift height
8042	27,100 lbs. op. wt.	8,000 lbs. capacity	41' lift height
12054	30,357 lbs. op. wt.	12,000 lbs. capacity	53' lift height
			SKYTRAK

CAT® INDUSTRIAL FORKLIFT



GP25N	7,980.8 lbs. op. wt.	5,000 lbs. capacity	188" lift height
GP30N	9,391.7 lbs. op. wt.	6,000 lbs. capacity	258.7" lift height

ROUGH TERRIAN FORKLIFTS



LK8M 8,000 lbs. lift capacity Mast height range 10-21' 74 HP

- Cat C3.4B 4-Cylinder turbo diesel engine
- Cat 4-Speed fully synchromesh power shuttle transmission
- 4 Wheel Drive
- Standard carriage 60"



GENIE STRAIGHT BOOM LIFTS



S45	45' platform ht.	500 lbs. capacity	15,500 lbs. op. wt.
S60 FE	61' platform ht.	600 lbs. capacity	17,750 lbs. op. wt.
S65	65' platform ht.	660 lbs. capacity	23,000 lbs. op. wt.
S65 XC	65' platform ht.	660 lbs. capacity	25,000 lbs. op. wt.
S85	85' platform ht.	500 lbs. capacity	38,000 lbs. op. wt.
S125	125′ platform ht.	500 lbs. capacity	45,000 lbs. op. wt.
SX125XC	125′ platform ht.	600 lbs. capacity	45,600 lbs. op. wt.
SX135XC	125′ platform ht.	660 lbs. capacity	47,500 lbs. op. wt.
SX150	152′ platform ht.	750 lbs. capacity	49,950 lbs. op. wt.
SX180	180′ platform ht.	750 lbs. capacity	54,000 lbs. op. wt.

*S65 XC is the Trax model



JLG STRAIGHT BOOM LIFTS



460SJ	46' platform ht.	600 lbs. capacity	16,500 lbs. op. wt.
660SJ	65' platform ht.	550 lbs. capacity	25,000 lbs. op. wt.
860SJ	86' platform ht.	500 lbs. capacity	36,000 lbs. op. wt.
1350SJ	135' platform ht.	500 lbs. capacity	45,000 lbs. op. wt.



GENIE TRACK STRAIGHT BOOM LIFT



S80J	80' platform ht.	660 lbs. capacity	22,200 lbs. op. wt.
S45	45' platform ht.	500 lbs. capacity	14,790 lbs. op. wt.
S65 XC Trax	65' platform ht.	660 lbs. capacity	29,000 lbs. op. wt.

GENIE ARTICULATING BOOM LIFTS



Z45/25RT***	45' platform ht.	500 lbs. capacity	15,900 lbs. op. wt.
Z45 FE*	45' platform ht.	600 lbs. capacity	14,460 lbs. op. wt
Z60FE*	59' platform ht.	500 lbs. capacity	17,100 lbs. op. wt.
Z62/40**	60′ platform ht.	500 lbs. capacity	23,000 lbs. op. wt.
Z80/60**	80′ platform ht.	500 lbs. capacity	38,000 lbs. op. wt.
Z135/70**	135' platform ht.	600 lbs. capacity	45,500 lbs. op. wt.

*Electric **Diesel *** Dual Fuel/Diesel



JLG ARTICULATING BOOM LIFT



340AJ 33' platform ht. 500 lbs. capacity 10,175 lbs. op. wt. 1500AJP 57,400 lbs. op. wt. 150' platform ht. 600 lbs. capacity



GENIE ELECTRIC ARTICULATING BOOM LIFT



Z40/23NRJ	40' platform ht.	500 lbs. capacity	15,300 lbs op. wt.
Z34/22N	34'6" platform ht.	500 lbs. capacity	11,500 lbs. op. wt.
Z45/25 DC	45' platform ht.	500 lbs. capacity	15,400 lbs. op. wt



JLG ELECTRIC TRACK **ARTICULATING ATRIUM LIFT**



X600AJ 10,175 lbs. op. wt. 33' platform ht. 500 lbs. capacity X770AJ 77' platform ht. 500 lbs. capacity 9,655 lbs. op. wt.



JLG ELECTRIC MAST LIFT



32E Toucan 32' platform ht. 500 lbs. capacity 10,140 lbs. op. wt.

Electric Mast Lift with JIB



GENIE TOWABLE MANLIFTS



TZ-34/20	34' platform ht.	500 lbs. capacity	3,155 lbs op. wt.
TZ-50	50' platform ht.	500 lbs. capacity	4,400 lbs op. wt.

Genie

JLG RT SCISSOR LIFT



RT5394 50' platform ht. 1500 lbs. capacity 17,110 lbs. op. wt. **ERT4769*** 47' platform ht. 15,200 lbs. op. wt. 800 lbs. capacity RT= Rough Terrain

* Hybrid



GENIE SCISSOR LIFTS



GS1930*	19' platform ht.	30" width	3,000 lbs. op. wt.
GS2632*	26' platform ht.	32" width	4,500 lbs. op. wt.
GS2646*	26' platform ht.	46" width	4,346 lbs op. wt.
GS3232*	32' platform ht.	32" width	6,871 lbs op. wt.
GS3246*	32' platform ht.	46" width	5,600 lbs. op. wt.
GS4046*	40' platform ht.	46" width	6,900 lbs. op. wt.
GS2669RT**	26' platform ht.	69" width	7,300 lbs. op. wt.
GS3369RT**	33' platform ht.	69" width	7,900 lbs. op. wt.
GS3390RT**	33′ platform ht.	90" width	12,000 lbs. op. wt.
GS4069RT**	40' platform ht.	69" width	10,392 lbs. op. wt.
GS5390RT**	53′ platform ht.	92" width	16,567 lbs op. wt.

*Electric **Diesel



CONCRETE BUGGY



WBH-21EF	3200 lbs. max. load capacity	18 hp	1,492 lbs. op. wt.
WTB-16PD	2500 lbs. max. load capacity	22 hp	2,138 lbs.op. wt.



ON-ROAD WATER TRUCKS



|--|

MEC MICRO SCISSOR LIFTS



Micro 13XD	13' platform ht.	500 lbs. capacity	2,116 lbs. op. wt.
Micro 19XD	19' platform ht.	500 lbs. capacity	2,820 lbs. op. wt.



MEC SCISSOR LIFTS



MME25	25′ platform ht.	350 lbs. capacity	3,310 lbs. op. wt.
4069ERT**	40' platform ht.	800 lbs. capacity	11,000 lbs. op. wt.
4555SE*	45′ platform ht.	750 lbs. capacity	7,760 lbs. op. wt.
4046SE*	39' platform ht.	750 lbs. capacity	7,140 lbs. op. wt.

^{*} Electric Lift ** Electric Lift w/ generator



ON-ROAD DUMP TRUCKS



5.6 yd³ capacity	Single Axle	240 hp
12-14 Yard Freightliner M2	Tandem Axle	300 hp



OFF-ROAD WATER TRUCKS



912WW 2,600 gallon capacity



OFF-ROAD DUMP TRUCKS



707G	74 HP	4.6 yd³ capacity	26,500 lbs. op. wt.
912HM	131 HP	7.3 vd3 canacity	41 100 lbs on wt



CRASH ATTENUATOR TRUCKS



- Crash rated up to 65 mph
- Shatterproof work lights
- Solar powered arrow board
- Integrated man baskets both curb and street sides
- Meets all federal and state regulations for impact



WACKER NEUSON DUMPER



DV60 74 horse power 13,227 lbs max payload 10,028 lbs. op. wt.

Dual view with turf tires



MESSAGE BOARD



WTMMB(A) 11 x 16 in Batteries and font size Solar

48 pixels width, 27 pixels height



ARROW BOARD



WTSP55-LSA

- "On" Operating Status, GPS Location and Compass Bearing
- Caution Pattern, Arrow Pattern and Arrow Direction
- Arrow Board ID, Trailer Stance and System Health



LIGHT TOWERS



Night Light Pro II 8kW Cat 1.1 Engine 25' Electric Powered Mast





SECURITY TOWER



The Wanco Mini Solar Surveillance Tower is equipped with a feature-rich camera system that's simple to deploy and will keep your job site secure.

• Tubular steel towable trailer with 2" ball hitch

ALL-TERRAIN VEHICLES

- 20' telescoping tower
- 360 degrees camera rotation
- Equipped with two mini dome infrared 1080p resolution cameras
- 750 watt solar tower





MULE (4 Seater) 4x4 (Diesel Engine)



Kawasaki



Ranger 570 (4 Seater) 4x4 (Gas Engine)

AIR COMPRESSORS





 185CFM
 61 HP
 80-128 PSI

 Atlas Copco
 Atlas Copco

 XAS 188
 49 HP
 100 PSI

TRAILER MOUNTED CENTRIFUGAL



PAC F44 KD	4" Open Trailer Centr. Pump	49 horsepower
PAC F44 KD-S	4" Silenced Enclosed Centr. Pump	49 horsepower
PAC F66 KD	6" Open Trailer Centr. Pump	74 horsepower
PAC F66 KD-S	6" Silenced Enclosed Centr. Pump	74 horsepower
PAC F88 JD-S	8" Silenced Enclosed Centr. Pump	74 horsepower

Atlas Copco

WATER TRAILERS



- 525 gallon polypropylene tank with internal baffles
- Simple water flow controls and reliable pumps
- Smooth highway and job site towing
- Hydraulic surge brakes
- Height adjustable channels for multiple hitch options
- MADE IN THE USA and DOT compliant



TRAILERS



T-12DT	12,000 lbs. capacity	14'/16'/18' Deck Length
T-14DT	14,000 lbs. capacity	16'/18' Deck Length
T-30	30,000 lbs. capacity	20' Deck Length





*All specifications are estimates.

ATTACHMENTS



POWER BOX RAKES

For clearing and preparing soil in landscape finishing applications, providing evenly spaced seedbed in many soil types and conditions Can dethatch, remove old lawns/weeds, grade, level, rake and remove debris.



BROOMS

Perfect clean-up work tools. Clean and remove dirt, rock and other debris from streets, parking lots, and factory floors. Also used in paving recycling, demolition and airport maintenance.



LANDSCAPE TILLERS

Perfect work tools for landscaping, agricultural and construction applications. Hardened, replaceable tines quickly pulverize soil, mix other materials into soil and even stabilize and level existing terrain.



COLD PLANERS

Effectively mill asphalt and concrete, restoring surfaces to specifies grades or levels. Available in standard and high flow models.



BRUSHCUTTERS

High strength, high speed cutting blades efficiently cut brush, small trees and dense overgrowth for easy removal. Ideal for clearing overgrowth from highway medians, utility easements, and for initial land clearing for housing and parks and recreational areas.



FORESTRY HEAD

For those in between jobs where mowing and mulching is needed. The Foresty Head can cut up to a 14" tree and reduce 6" saplings into mulch.



MULCHERS

Designed for high performance while cutting and mulching vegetation and undergrowth in typical forest terrain. Reduces saplings, shrubs, and trees into mulched material, making it ideal for environmental maintenence of to clear land for construction purposes.



MULCHING HEAD

Offering front-mounted mulchers for skid steers and boom mounted mulchers for excavators.



ANGLE BLADES

Push dirt and gravel with ease, and efficiently perform finish grade work in construction, landscaping and road building.



LASER GUIDED BOX BLADE

Cat Box Blades are designed for grading and leveling. Each model is designed to operate both manually and automatically with the use of Laser or GPS grading systems.



VIBRATORY COMPACTORS

Ideal for asphalt patchwork and for compacting soil, sand and gravel prior to pouring concrete or laying asphalt. Provide excellent maneuverability for small compacting jobs that do not require a dedicated roller.



SKID STEER FORKS

Load and transport palletized materials quickly and efficiently. Excellent for construction, industrial, agricultural and landscaping applications.



SMART GRADER BLADE

Cat Smart Grader Blade attachments are for cutting, moving and grading dirt, gravel, sand and virtually any other material used as a base. Can be equipped with laser and GPS.



AUGERS

Drill holes for footings, fencing, signs and trees. Optimum speed and visibility, break-out capabilities and capacity torque deliver highest possible productivity in most soils. Standard and high flow models.



INDUSTRIAL GRAPPLE BUCKETS & GRAPPLE RAKES

Durable demolition work tools. Easily handle difficult objects like railroad ties, rocks, demolition scrap and recycling debris.

Great for loose, hard-to-handle recyclable material. Pick up irregularly shaped objects, pierce and carry paper, cardboard, wood and light gauge metal scrap.



HAMMERS

Ideal for demolition—break up concrete, asphalt, rock or masonry. New models feature improved breaking productivity, more power and are totally unique to Caterpillar.



MATERIAL HANDLING ARMS

Load, carry and position materials found in industrial, construction and agricultural applications. Also good for transporting and setting trees or shrubs for landscaping.



TRENCHERS

Great work tools for utility contractors. Cut straight, narrow trenches in soil for laying electrical and cable lines—or water and gas pipes. Available in standard and high flow models.





ST. AUGUSTINE Corporate Headquarters

500 World Commerce Pkwy. 904.494.7464

BROOKSVILLE 14300 Ponce De Leon Blvd.

LAKE CITY

390 S.W. Ring Court

352.797.9500

386.961.0392

LAKELAND

3425 Reynolds Rd.

401 N. Tomaka Farms Rd. 386.947.4939

DAYTONA BEACH

352.797.9500

GAINESVILLE 4900 North Main St.

LEESBURG 2900 South Street

352.387.7368

352.321.3100

JACKSONVILLE

OCALA 1890 N.W. 63rd St.

330 Pecan Park Rd. 904.714.3517

*All specifications are estimates.

352.620.0660

ORLANDO

9901 Ringhaver Dr.

407.856.4851

PALM BAY

390 S.W. Ring Court

321.725.6420

SARASOTA

7500 26th Court E.

941.359.6050

ST. PETERSBURG

2700 Gandy Blvd. N.

727.471.2151



TALLAHASSEE

850.514.1958

10421 Fern Hill Dr. (Riverview)

813.671.3200

TITUSVILLE

321.837.5797

3950 South St.

TAMPA

32000 Blue Star Highway (Midway)



MEDIUM DOZERS



D4LGP	130 HP	30,000 lbs. op. wt.	6-Way Blade
D5 LGP	170 HP	43,000 lbs. op. wt.	6-Way Blade
D6 XL	215 HP	51,000 lbs. op. wt.	S Blade
D6 LGP	215 HP	51,000 lbs. op. wt.	S Blade
D6 LGP PAT	215 HP	51,000 lbs. op. wt.	S Blade

Available attachments include: GPS, Laser AccuGrade $^{\text{TM}}$.

LARGE DOZERS



D8	3 HP	88,000 lbs. op. wt.	SU Blade	

Available attachments include: GPS, Laser AccuGrade™.

MEDIUM WHEEL LOADERS



938	188 HP	36,000 lbs. op. wt.	3.5 yd³ Bucket
950GC	225 HP	42,000 lbs. op. wt.	4.0 yd³ Bucket
950	249 HP	43,000 lbs. op. wt.	4.0 yd³ Bucket
962	269 HP	45,000 lbs. op. wt.	4.75 yd³ Bucket
966	321 HP	52,000 lbs. op. wt.	5.5 yd³ Bucket
972	339 HP	55,000 lbs. op. wt.	6.25 yd³ Bucket
980	420 HP	67,000 lbs. op. wt.	7.75 yd³ Bucket

Available attachments include: Buckets, forks, material handling arms, rakes.

LARGE EXCAVATORS



336	311 HP	82,000 lbs. op. wt.	3.0 yd³ Bucket
340	347 HP	84,600 lbs. op. wt.	3.5 yd³ Bucket
349	424 HP	106,000 lbs. op. wt.	4.04 yd³ Bucket
350	414 HP	105,000 lbs. op. wt.	4.03 yd³ Bucket
352	445 HP	108,000 lbs. op. wt.	5.0 yd³ Bucket
374	484 HP	163,000 lbs. op. wt.	6.25 yd³ Bucket

Available attachments include: Thumbs, clean-out buckets, GPS.

MEDIUM EXCAVATORS



			Sender or
325	172 HP	63,000 lbs. op. wt.	2.08 – 2.4 yd³ Bucket
326	201 HP	57,100 lbs. op. wt.	2.4 yd³ Bucket
330GC	202 HP	68,000 lbs. op. wt.	2.4 yd³ Bucket
330	273 HP	69,000 lbs. op. wt.	2.4 yd³ Bucket
335	273 HP	77,000 lbs. op. wt.	2.4 yd³ Bucket

LONG REACH EXCAVATORS



			-
323	172 HP	57,000 lbs. op. wt.	1.0 yd³ Bucket
326	204 HP	69,000 lbs. op. wt.	1.0 yd³ Bucket
330	273 HP	78,000 lbs. op. wt.	1.0 yd³ Bucket
340	347 HP	94,000 lbs. op. wt.	1.3 vd³ Bucket

PNEUMATIC COMPACTORS



СТЗА	36 HP	9-wheel	5,500 lbs.
CT5	gg HP	7-wheel	9 100 lbc



WHEELED EXCAVATORS



M318F	174 HP	44,000 lbs. op. wt.	Various Size Buckets
M320	174 HP	47,000 lbs. op. wt.	Various Size Buckets
M322	174 HP	53,000 lbs. op. wt.	Various Size Buckets

ASPHALT COMPACTORS



CB4.0	48 HP	51" drum	7,971 lbs.
CB4.4	48 HP	55" drum	8,362 lbs.
CB7	100 HP	59" drum	19,500 lbs.
CB10	120 HP	67" drum	22,000 lbs.
CB13	142 HP	79" drum	28,000 lbs.
CB15	142 HP	84" drum	29,000 lbs.

^{*}These are Double Drum

MOTOR GRADERS



120	139 HP	14' blade	36,000 lbs. op. wt.
140GC	196 HP	14' blade	39,000 lbs. op. wt.
140	250 HP	14' blade	43,000 lbs. op. wt.

ASPHALT COMPACTORS



C303A	30 HP	48" drum	5,700 lbs.
C307A	74 HP	51" drum	14,000 lbs.
C310A	74 HP	53" drum	20,160 lbs.



ARTICULATED TRUCKS



		HEAPED SAE 2:1	TAILGATE HEAPED SAE 2:1	
725	334 HP	19.6 yd³ cap.	20.4 yd³ cap.	51,000 lbs. op. wt.
730	367 HP	$23.0 \text{ yd}^3 \text{ cap.}$	24.6yd³ cap.	53,000 lbs. op. wt.
740GC	439 HP	29.7 yd³ cap.	31.9 yd³ cap.	72,000 lbs. op. wt.
745	504 HP	33.7 yd³ cap.	34.7 yd ³ cap.	74,000 lbs. op. wt.

ON-ROAD WATER TRUCKS



SOIL COMPACTORS



CS7	100 HP	66" drum	16,000 lbs. op. wt.
CS10GC*	121 HP	84" drum	23,500 lbs. op. wt.
CS11GC*	121 HP	84" drum	25,000 lbs. op. wt.
CS12GC*	112 HP	84" drum	27,798 lbs. op. wt.
CP10GC	121 HP	84" drum	24,000 lbs. op. wt.
CP11GC	133 HP	84" drum	25,000 lbs. op. wt.
815	284 HP	39" drum	50,000 lbs. op. wt.

^{*}Vibratory Soil

OFF-ROAD WATER TRUCKS



	The second secon
725WW	5,000 gallon capacity
730WW	6,000 gallon capacity

PNEUMATIC COMPACTORS



CW16* 100 HP 9-wheel EMPTY BALLAST 11,500 lbs. FULL BALLAST 33,000 lbs.

TRACTOR SCRAPER



 $\textbf{3630T+Pan} \qquad 407 HP \qquad 23/28 \ yd^{3} \ cap. \quad \textit{Tractor} \ 66,000/\textit{Pan} \ 30,000 \ lbs. \ op. \ wt.$



*All specifications are estimates.

PAVERS



			-
AP400	120 HP	8' - 15'6" Screed	29,800 lbs.
AP455	120 HP	8' - 15'6" Screed	31,292 lbs.
AP500	148 HP	8' - 15'6" Screed	31,772 lbs.
AP555	148 HP	8' - 15'6" Screed	33,488 lbs.
AP600	174 HP	8' - 15'6" Screed	36,716 lbs.
AP655	174 HP	8' - 15'6" Screed	40,560 lbs.
AP1000	225 HP	10' - 19'6" Screed	42,620 lbs.
AP1055	225 HP	10' - 19'6" Screed	45,090 lbs.

SWEEPERS



B400 74 HP 78" brush 8,400 lbs.



AIR BURNERS

T300





PAVERS



49 HP	8' - 13' Screed	12,800 lbs.
67 HP	3'10" - 7' Screed	13,000 lbs.
74 HP	7'8" - 14'4" Screed	16,200 lbs.
74 HP	7'8" - 15' Screed	18,000 lbs.
120 HP	8' - 15'8" Screed	22,000 lbs.
120 HP	7'8" - 15'4" Screed	25,000 lbs.
49 HP	8' - 13' Screed	10,600 lbs.
	67 HP 74 HP 74 HP 120 HP	67 HP 3'10" - 7' Screed 74 HP 7'8" - 14'4" Screed 74 HP 7'8" - 15' Screed 120 HP 8' - 15'8" Screed 120 HP 7'8" - 15'4" Screed



ROAD WIDENERS



W330B	67 HP	widens up to 6'	14,800 lbs.	
W430	83 HP	widens up to 8'	19,500 lbs.	
W530	114 HP	widens up to 10'	26,300 lbs.	
W730C	174 HP	widens up to 14'	37,200 lbs.	



REMIXING TRANSFER VEHICLES



E1250C	250 HP	113" truck hopper width	53,900 lbs.	
E1650A	250 HP	113" truck hopper width	67,200 lbs.	
E2850C	300 HP	113" truck hopper width	72,500 lbs.	




SOIL MIXERS/RECLAMIERS



S200	375 HP	Max. 78" cut width/14" cut depth	40,000 lbs.
RM400	415 HP	Max. 96" cut width/20" cut depth	58,000 lbs.
RM500B	595 HP	Max. 96" cut width/20" cut depth	62,000 lbs.

NEED TO STAY ON BUDGET? YEAH, WE'RE **UP FOR IT** Ring Power

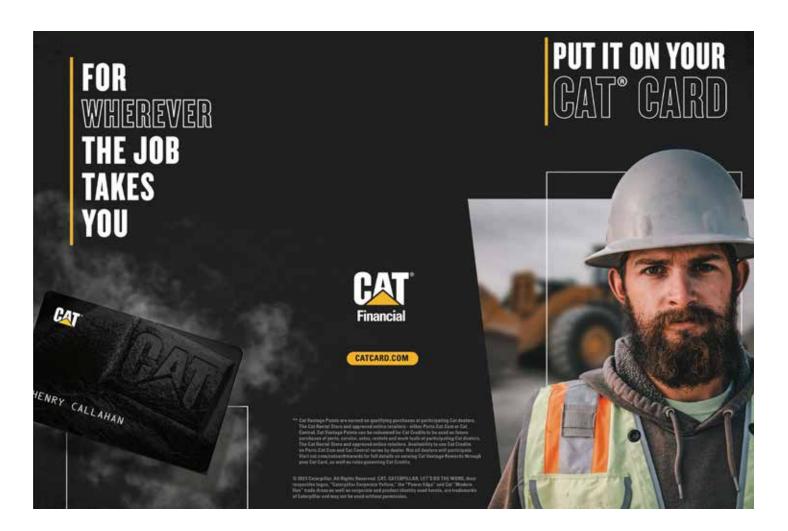

YES, WE HAVE MONTHLY RENTALS



TALLAHASSEE | PERRY | LAKE CITY | GAINESVILLE OCALA | JACKSONVILLE | ST.AUGUSTINE

904.737.7730 ext. 1284

BROOKSVILLE | LAKELAND | TAMPA | SARASOTA

813.671.3700 ext. 8111

DAYTONA | ORLANDO | PALM BAY

407.855.6195 ext. 3202





VACUUM TRUCKS



X-CAVATOR HYDROVAC — 1,300 gal. 20 GPM/4,000 psi water pump ◆ Vacuum system: Positive Displacement 18" HG/6000CFM ◆ Water tank capacity: 1300 Gallons ◆ Debris tank size: 12 yd³ ◆ Up to 26' x 8" Rear Mounted Extendable Boom with Pendant Station. 310 degree rotation & vertical boom travel +45/-22 degrees ◆ Hydro-excavation package includes 100' retractable reel and high pressure wand ◆ DOT Light Bar ◆ 30' of aluminum pipe with clamps.

COMBINATION VAC — 1,300 gal. 80 GPM/2,000 psi water pump ◆ Vacuum system: Positive Displacement 18" HG/6000CFM ◆ Water pump size: 80GPM@2000PSI ◆ Water tank capacity: 1300 Gallons ◆ Debris tank size: 12 yd³ ◆ 10' telescopic boom/270° rotation ◆ 180° articulating front hose reel with 500' of jet hose ◆ Hydro-excavation package includes 50' retractable reel and high ◆ 30' of aluminum pipe with clamps. ◆ DOT Light Bar



BUCKET TRUCKS



		10.40000	
LTM40	44.5' working ht.	Non-Over Center (Telescopic Upper)	
LT40	45' working ht.	Articulated Telescopic Material Handler	
SC42	47.6' working ht.	Over Center Material Handler	
TC55 OPTIMA	60' working ht.	Non-Over Center Material Handler	
TCX55 OPTIMA	60' working ht.	Non-Over Center Material Handler	
RMX75	79.7' working ht.	Non-Over Center Material Handler	
RMX100	105' working ht.	. Non-Over Center Material Handler	
TM100	105' working ht.	. Articulated Telescopic Material Handler	
TM100 T16 Track Unit	105' working ht.	Articulated Telescopic Material Handler	
TM125	125' working ht.	Non-Over Center Material Handler	
TM125 T16 Track	125' working ht.	Non-Over Center Material Handler	
TL45	50' working ht.	Articulated Telescopic Material Handler	
TL48	52.5' working ht.	Non-Over Center (Telescopic Upper)	
TC55-T8 Track Unit	60' working ht.	Non-Over Center Material Handler	

All trucks available in either 4X2, 4x4 or 6x6.





DIGGER DERRICKS



C4045 T8 Track Unit	11,000 lbs. cap. @ 10' radius	Max. 47' sheave ht.
COMMANDER 4047	11,000 lbs. cap. @ 10' radius	Max. 47' sheave ht.
COMMANDER 6060	18,100 lbs. cap. @ 10' radius	Max. 60' sheave ht.
GENERAL 65	21,000 lbs. cap. @ 10' radius	Max. 65' sheave ht.
GENERAL 65 T16 Track Unit	21,010 lbs. cap. @ 10' radius	Max. 65.1' sheave ht.
GENERAL 80	24,000 lbs. cap. @ 10' radius	Max. 80' sheave ht.

All trucks available in either 4X2, 4x4 or 6x6.





TO RENT CALL 844.766.7368

E-mail: utc@ringpower.com

REAR EASEMENT DERRICKS



MINI 33P	27 HP	Max. 42' sheave ht.	3,300 lbs. lifting cap.
SUPER 6000	32 HP	Max. 48' sheave ht.	6,000 lbs. lifting cap.
PATRIOT 50	76 HP	Max. 51' sheave ht.	6.000 lbs. lifting cap.

*Includes trailer



GRAPPLE TRUCKS



M100 L72	28 yd³ dump body	3,000/7,300 lbs lifting cap. @ 24'/10'
M13 A80	53 yd³ dump body	3,000/9,000 lbs lifting cap. @ 26'/10'
M13 A98	53 yd³ dump body	2,090/8,590 lbs lifting cap. @ 32.2'/10'
M13 A98	64 yd3 rear mount body	2,090/8,590 lbs lifting cap. @ 32.2'/10'



PRESSURE DRILLS




PATRIOT P1	35' drill depth	96" maximum auger diameter
LHD 22SM	22' drill depth	72" maximum auger diameter
LHD 32SM	32' drill depth	72" maximum auger diameter
LHD 35SM	35' drill depth	72" maximum auger diameter
STUD 40*	40' drill depth	72" maximum auger diameter
LHD 50SM	50' drill depth	72" maximum auger diameter
MHD XL50	50' drill depth	144" maximum auger diameter
MHD XL50C	50' drill depth	144" maximum auger diameter

^{*}Cat Excavator Chassis





WORK TRUCKS

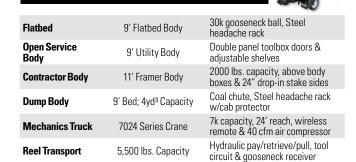

TRAILERS




			- months
POLE	10,500 - 22,400 lbs. cap.	20' – 74' Length	1-2 Axles
REEL	6,500 – 19,000 lbs. cap.	11'2" - 30' Length	1-3 Axles
STRINGING EQUIPMENT	10,500 – 22,000 lbs. cap.	11'2" - 30' Length	1-3 Axles



Mission Statement

"To provide innovative solutions at the highest standard through honest and professional relationships."

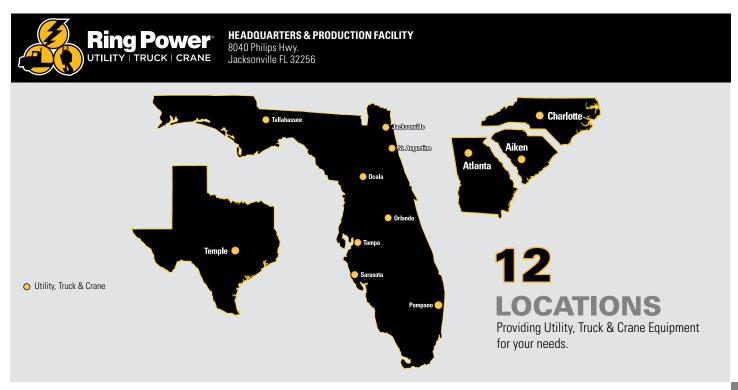



PORTABLE GENERATOR SETS

XQ30-XQ425 =



Size	Voltage	Fuel Capacity	GPH	Dimensions	Weight
35kW	480/208	55	2.6	92" x 42"	2,970 lbs
60kW	480/208	149	4.27	144" x 44"	4,900 lbs
100kW	480/208	190	7.2	124" x 74"	5,800 lbs
125kW	480/208	223	9	165" x 45"	10,000 lbs
200kW	480/208	306	14	158" x 44"	14,000 lbs
300kW	480/208	470	20	200" x 61"	17,000 lbs
400kW	480/208	470	25	200" x 61"	17,000 lbs

- Dual voltage output
- Convenience outlets
- Remote auto-start/stop capability
- Emissions certified
- 110% secondary containment
- Sound attenuated

Above listed units have the ability to provide simultaneous voltage. Units are equipped with customer convenience panels, Fuel Capacity in Gallons GPH rated at 100%, Weight is measured in pounds. Units can be skid mounted.

PORTABLE GENERATOR SETS X0500-X0800



Size	Voltage	Fuel Capacity	GPH	Dimensions	Weight
500kW	480/208	660	30	20' x 8'	32,000 lbs
570kW	480/208	700	37	23.5′ x 8′	39,500 lbs

- 208 or 480 volt capable
- Engineered in 20'-30' containers
- Multi-voltage distribution panel
- Emissions certified
- Sound attenuated

Fuel Capacity in Gallons GPH rated at 100%, Weight is measured in pounds. Above listed units can be used at either 208 or 480 VAC.

PORTABLE GENERATOR SETS X01000-X02280



Size	Voltage	Fuel Capacity	GPH	Dimensions	Weight
1000kW	480/208	1250	70	30' x 8'	49,000 lbs
1140kW	480/208	1260	66.4	40' x 9'6"	66,907 lbs
2000kW	480	1250	138	40' x 8'	89,000 lbs
2280kW	480	1050	128	48' x 9'6"	90,344 lbs

- Reliable, fuel efficient diesel
- Engineered in 40' ISO containers
- Sound attenuated
- Utility grade switchgear
- · Emissions certified

Fuel Capacity in Gallons GPH rated at 100%, Weight is measured in pounds. Above units have utility-paralleling switchgears.

LOAD BANKS



2500 KVA	2640 kW	Resistive/Reactive	480 Volts
3300 KVA	2000 kW	Resistive	480/240 Volts

TRANSFORMERS



2500 KVA 480: Skid Mounted

4160 Volts 3 Phase Wye and 12,470 Volts 3 Phase Wye. Higher ratings available upon request.

DOUBLE WALL FUEL TANKS



550 Gallon	Skid Mounted
2500 Gallon	Skid Mounted

Available accessories: 10' x 25' and 15' x 50' Containment Berm & Pumps.

AIR CONDITIONERS



10 Ton	Skid Mounted
25 Ton	Skid Mounted
30 Ton	Skid Mounted
40 Ton	Skid Mounted
60 Ton	Skid Mounted
80 Ton	Skid Mounted
90 Ton	Skid Mounted

ELECTRIC WATER CHILLERS

Air Cooled – Skid Mounted



30Ton	Skid Mounted
40 Ton	Skid Mounted
60 Ton	Skid Mounted
80 Ton	Skid Mounted
100 Ton	Skid Mounted
200 Ton	Skid Mounted

ELECTRIC WATER CHILLERS

Air Cooled - Trailer Mounted



150 Ton	20' ISO Container on Chassis
200 Ton	20' ISO Container on Chassis
250 Ton	20' ISO Container on Chassis
300 Ton	40' ISO Container on Chassis
400 Ton	40' ISO Container on Chassis
500 Ton	40' ISO Container on Chassis

Scan QR to Access PSD Territory Map



DISTRIBUTION EQUIPMENT & ACCESSORIES

100 Amp Duplex Panel 200 Amp Duplex Panel 100 Amp Quad Box Feeder Panel Quad Box String (30' Spacing) Feed-thru Quad Box (A, B or C Phase) 30' 10/5 Extension Cable 50' 10/5 Extension Cable 100' 10/5 Extension Cable 10' Female Pin & Sleeve Pigtail 50' 2/4 G Pin & Sleeve Extension Cable 400 Amp Pin & Sleeve Splitter Panel 50' 4/0 400 Amp Posi-Lok Cable 3' HD Rubber Cable Ramp End Caps for Ramp 1200 Amp Multipanel 200 Amp Camlok Distribution Box 400 Amp Camlok Distribution Box Spider Box with (6) Duplex Outlets 4-0000, Type W, Class K (400 amp capacity) 4-0000, Type W, Class K "Pigtail" (Female/Male)

ELECTRICAL FORMULAS

TO OBTAIN	Single Phase*	Three Phase*
Kilowatts	v x l x PF 1000	1.732 x v x l x PF 1000
kVA	vxl 1000	1.732 x v x l 1000
Horsepower required when generator kW is known (if generator efficiency is unknown use 0.93)	kW 0.746 x Efficiency (Generator)	kW 0.746 x Efficiency (Generator)
kW input when motor HP is known (if motor efficiency is unknown use 0.85 x HP)	HP x 0.746 Efficiency (Motor)	HP x 0.746 Efficiency (Motor)
Amperes when motor HP known	HP x 746 v x PF x Efficiency	HP x 746 1.732 x v x PF x Efficiency
Amperes when motor kW known	<u>kW x 1000</u> v x PF	kW x 1000 1.732 x v x PF
Amperes when motor kVA known	kVA x 1000 v	kVA x 1000 1.732 x v

^{*}Alternating Current

*All specifications are estimates.

AMPERAGE CHART

kV-A/kW AMPERAGE CHART 80% POWER

kV•A	kW	208V	220V	240V	380V	400V	440V	450V	480V	600V	2400V	3300V	4160V
6.3	5	17.5	16.5	15.2	9.6	9.1	8.3	8.1	7.6	6.1	_	_	_
9.4	7.5	26.1	24.7	22.6	14.3	13.6	12.3	12	11.3	9.1	_	_	_
12.5	10	34.7	33	30.1	19.2	18.2	16.6	16.2	15.1	12	_	_	_
18.7	15	52	49.5	45	28.8	27.3	24.9	24.4	22.5	18	_	_	_
25	20	69.5	66	60.2	38.4	36.4	33.2	32.4	30.1	24	6	4.4	3.5
31.3	25	87	82.5	75.5	48	45.5	41.5	40.5	37.8	30	7.5	5.5	4.4
37.5	30	104	99	90.3	57.6	54.6	49.8	48.7	45.2	36	9.1	6.6	5.2
50	40	139	132	120	77	73	66.5	65	60	48	12.1	8.8	7
62.5	50	173	165	152	96	91	83	81	76	61	15.1	10.9	8.7
75	60	208	198	181	115	109	99.6	97.5	91	72	18.1	13.1	10.5
93.8	75	261	247	226	143	136	123	120	113	90	22.6	16.4	13
100	80	278	264	240	154	146	133	130	120	96	24.1	17.6	13.9
125	100	347	330	301	192	182	166	162	150	120	30	21.8	17.5
156	125	433	413	375	240	228	208	204	188	150	38	27.3	22
187	150	520	495	450	288	273	249	244	225	180	45	33	26
219	175	608	577	527	335	318	289	283	264	211	53	38	31
250	200	694	660	601	384	364	332	324	301	241	60	44	35
312	250	866	825	751	480	455	415	405	376	300	75	55	43
375	300	1040	990	903	576	546	498	487	451	361	90	66	52
438	350	1220	1155	1053	672	637	581	568	527	422	105	77	61
500	400	1390	1320	1203	770	730	665	650	602	481	120	88	69
625	500	1735	1650	1504	960	910	830	810	752	602	150	109	87
750	600	2080	1980	1803	1150	1090	996	975	902	721	180	131	104
875	700	2430	2310	2104	1344	1274	1162	1136	1052	842	210	153	121
1000	800	2780	2640	2405	1540	1460	1330	1300	1203	962	241	176	139
1125	900	3120	2970	2709	1730	1640	1495	1460	1354	1082	271	197	156
1250	1000	3470	3300	3009	1920	1820	1660	1620	1504	1202	301	218	174
1563	1250	4350	4130	3765	2400	2280	2080	2040	1885	1503	376	273	218
1875	1500	5205	4950	4520	2880	2730	2490	2440	2260	1805	452	327	261
2188	1750	_	_	5280	3350	3180	2890	2830	2640	2106	528	380	304
2500	2000	_	_	6020	3840	3640	3320	3240	3015	2405	602	436	348
2812	2250	_	_	6780	4320	4095	3735	3645	3400	2710	678	491	392
3125	2500	_	_	7520	4800	4560	4160	4080	3765	3005	752	546	435
3750	3000	_	_	9040	5760	5460	4980	4880	4525	3610	904	654	522
4375	3500	_	_	10550	6700	6360	5780	5660	5285	4220	1055	760	610
5000	4000	_	_	12040	7680	7280	6640	6480	6035	4810	1204	872	695

CONVERSION FORMULAS

The following factors can be used to convert from English to the most common SI Metric values.

MEASUREMENT	MULTIPLY THIS ENGLISH VALUE	BY	TO OBTAIN THIS METRIC VALUE
Capacity	Tons Refrigerent Effect (ton)	3.516	Kilowatts (kW)
Power	Horsepower (hp)	0.7457	Kilowatts (kW)
Flow Rate	Gallons Per Minute (gpm)	0.0631	Liters/Second (L/s)
Length in Feet	Number of Feet (ft)	304.8	Millimeters (mm)
Length in Inches	Number 0f Inches (in)	25.4	Millimeters (mm)
Weight	Number Of Pounds (lbs)	0.4536	Kilograms (kg)
Velocity	Feet Per Second (fps)	0.3048	Meters Per Second (m/s)
Pressure Drop in Feet	Feet of Water (ft)	2.090	Kilopascals (kPa)
Pressure Drop Per Square Inch Pounds Per Square Inch (psi)		6.895	Kilopascals (kPa)
Volume Square Feet (ft²)		0.09289	Square Meters (m²)

CONVERSION CHARTS

TEMPERATURE CONVERSION CHART FAHRENHEIT TO CELSIUS

(Celsius temperatures shown are rounded to the nearest degree)

°F	°C	°F	°C		°F	°C		°F	°C	°F	°C	°F	°C
0	-18	20	-7		40	4		60	16	80	27	100	38
1	-17	21	-6		41	5		61	16	81	27	101	38
2	-17	22	-6		42	6		62	17	82	28	102	39
3	-16	23	-5		43	6		63	17	83	28	103	39
4	-16	24	-4		44	7		64	18	84	29	104	40
5	-15	25	-4		45	7		65	18	85	29	105	41
6	-14	26	-3		46	8		66	19	86	30	106	41
7	-14	27	-3		47	8		67	19	87	31	107	42
8	-13	28	-2		48	9		68	20	88	31	108	42
9	-13	29	-2		49	9]	69	21	89	32	109	43
10	-12	30	-1]	50	10		70	21	90	32	110	43
11	-12	31	-1		51	11		71	22	91	33	111	44
12	-11	32	0]	52	11		72	22	92	33	112	44
13	-11	33	1		53	12		73	23	93	34	113	45
14	-10	34	1]	54	12		74	23	94	34	114	46
15	-9	35	2		55	13		75	24	95	35	115	46
16	-9	36	2		56	13		76	24	96	36	116	47
17	-8	37	3		57	. 14		77	. 25	97	36	117	47
18	-8	38	3]	58	14		78	26	98	37	118	48
19	-7	39	4		59	15		79	26	99	37	119	48

To convert any Fahrenheit temperature not shown to a Celsius temperature, subtract 32° and multiply by 0.5556. To convert a temperature difference from degrees Fahrenheit (°F) to degrees Celsius (°C), multiply by 0.5556. Values provided in this guide are in the English inch-pound (I-P) system.

RENT WEEKLY & MONTHLY



TALLAHASSEE | PERRY | LAKE CITY | GAINESVILLE | JACKSONVILLE | ST. AUGUSTINE

904.494.1242

OCALA | BROOKSVILLE | LAKELAND TAMPA | SARASOTA

813.865.2518

DAYTONA | ORLANDO | PALM BAY

407.472.6235



PORTABLE AIR COMPRESSORS

Diesel =



400H HAF	400 CFM	200 PSI	Aftercooled & Filtered "IQ" Air
900H AF	900 CFM	150 PSI	Aftercooled & Filtered "IQ" Air
900XHH/1150XH	900/1150 CFM	500/350 PSI	Aftercooled Air
1600H AF	1600 CFM	150 PSI	Aftercooled & Filtered "IO" Air



OIL FREE AIR COMPRESSORS



DR13-200	785/639 CFM	125/150 PSI	200 HP	"Oil Free" Air
DE18	1550 CFM	135 PSI	540 HP	"Oil Free" Air



PORTABLE AIR COMPRESSORS

Diesel =



XAS 400-200	393 CFM	200 PSI	Aftercooled & Filtered "IQ" Air
XAS 950	950/900/754 CFM	100/150/200 PSI	Aftercooled & Filtered "IQ" Air
XRVS 1000+	1000/875 CFM	365/510 PSI	AF "IQ" Air & Fuel Xpert
XRVS 1350	1335 CFM	365 PSI	AF "IQ" Air & Fuel Xpert
XRVS 1550+	1350/1550 CFM	510/365 PSI	Aftercooled and Fuel Xpert
XAS 1800	1600/1800 CFM	225 PSI	Aftercooled & Filtered "IQ" Air

Atlas Copco

DESICCANT AIR DRYERS



RDH-450	450 SCFM	90" x 42" x 60"	Wt. 1,800 lbs
RDH-930-G	930 SCFM	80" x 75" x 71"	Wt. 3,800 lbs
RDH-1550-G	1550 SCFM	79" x 83" x 78"	Wt. 5,000 lbs
RDH-2100-G	2100 SCFM	78" x 82" x 102"	Wt. 8,000 lbs
RDH-3000-G	3000 SCFM	81" x 91" x 115"	Wt. 9,200 lbs
RDH-5400-G	5400 SCFM	81" x 91" x 153"	Wt. 16,000 lbs

DESICCANT AIR DRYERS

High Pressure



RDHHP-930	1600 SCFM @ 350 PSIG	79" x 78" x 83"	Wt. 4,500 lbs
RDHHP-1550	2800 SCFM @ 350 PSIG	79" x 78" x 83"	Wt. 6,150 lbs
RDHHP-930-500	1800 SCFM @ 500 PSIG	79" x 78" x 83"	Wt. 4,500 lbs



E1035*

1035 CFM

150 PSI

Aftercooled & Filtered "IQ" Air





NEW PRODUCT



INDUSTRIAL AIR COMPRESSORS

Electric

LSR-16 149-351 CFM 100-175 PSI TSR-20 380-970 CFM

100-175 PSI

40-75 HP 100-200 HP

Variable Speed Drive Variable Speed Drive

Scan QR to Access ACG Territory Map



PRODUCTS & ACCESSORIES


Van Air Deliquescent Air Dryers 200 Gallon Receiver Tank

240 Gallon Receiver Tank 660 Gallon Receiver Tank 3/4" x 50' air hose 2" x 50' air hose

3" x 25' air hose Air Distribution Manifolds

PRESSURE LOSS IN AIR HOSES CHART

Air Pressure Loss in Hose-50 Foot Length (100 PSIG Inlet Pressure = / and 150 PSIG Inlet Pressure = /)

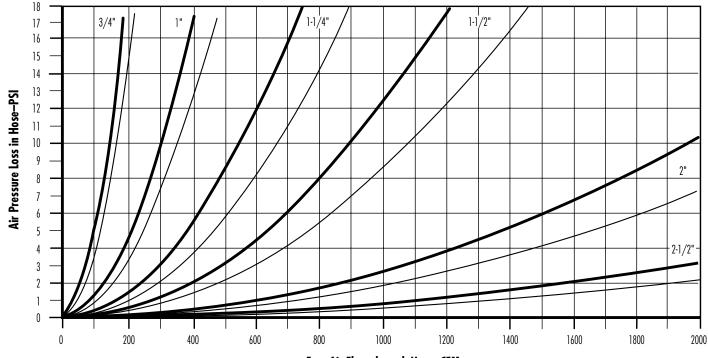

SANDBLAST NOZZLES AIR REQUIREMENTS CHARTS

Approximate Air Consumption (CFM) per Blast Nozzle

			Noz	zle Press	ure		
	60	70	80	90	100	120	140
Nozzle Size	PSI	PSI	PSI	PSI	PSI	PSI	PSI
1/8"	14	16	18	20	22	26	30
³ /16 "	32	36	41	45	49	58	66
1/4"	57	65	72	80	90	105	121
5/16 "	90	101	113	125	140	160	185
3/8"	126	145	163	182	200	235	270
7/16"	170	193	215	240	270	315	360
1/2"	230	260	290	320	350	410	470
5/8"	360	406	454	500	550	640	740
3/4"	518	585	652	720	790	925	1060

Approximate Abrasive Consumption (LBS/HR) per Blast Nozzle

			Noz	zie Press	sure		
	60	70	80	90	100	120	140
Nozzle Size	PSI	PSI	PSI	PSI	PSI	PSI	PSI
1/8"	90	105	115	130	140	165	190
3/16"	209	230	250	290	320	375	430
1/4"	365	420	460	500	560	660	760
5/16 "	575	650	725	825	900	1050	1200
3/8"	840	945	1050	1155	1260	1475	1700
7/16"	1150	1300	1450	1600	1750	2050	2350
1/2"	1460	1660	1850	2000	2250	2650	3000
5/8"	2290	2600	2900	3125	3520	4100	4750
3/4"	3300	3750	4180	4500	5060	5950	6800



RENT WEEKLY & MONTHLY



NORTH FLORIDA	904.237.2372 850.251.0019
WEST CENTRAL FLORIDA	813.781.7093 813.240.0915
EAST CENTRAL FLORIDA	407.202.5702
SOUTH FLORIDA	561.221.4608 561.756.1651



IC PNEUMATIC TIRE FORKLIFTS

Large |



15,500 - 100,000 lbs. Capacity @ 48" Load Center

Up to 236" Lift Height

96" Fork Length

Diesel - Full cabs with air conditioning

BRANDS: Kalmar, Cat Lift Trucks and Mitsubishi

IC CUSHION TIRE FORKLIFTS



3,000 - 15,500 lbs. Capacity

Up to 240" Lift Height

36" - 96" Fork Length

LP Gas

BRANDS: Cat Lift Trucks and Mitsubishi

PIGGYBACK & TRUCK MOUNTED FORKLIFTS



3,000 - 8,000 lbs. Capacity (Double Reach, All-Wheel Drive)

Up to 144" Lift Height

36" - 72" Forks, Block Forks and Lumber Forks

Diesel

BRANDS: Navigator, Princeton

3-WHEEL ELECTRIC FORKLIFTS



3,000 - 4,000 lbs. Capacity

Up to 240" Lift Height

36 Volt/48 Volt Electric

BRANDS: Cat Lift Trucks, Mitsubishi and Jungheinrich

NARROW AISLE ELECTRIC FORKLIFTS



3,000 - 4,500 lbs. Capacity

Up to 450 " Lift Height

24 Volt/36 Volt/48 Volt Electric

BRANDS: Cat Lift Trucks, Mitsubishi and Jungheinrich

IC PNEUMATIC TIRE FORKLIFTS



3,000 - 15,000 lbs. Capacity

Up to 240" Lift Height

42" - 96" Fork Length

LP Gas/Diesel

BRANDS: Cat Lift Trucks and Mitsubishi

ELECTRIC PALLET MOVERS



3,000 - 8,000 lbs. Capacity

Fork Dimensions: 27" x 48" or 27" x 96" (Walk Behind & Rider)

24 Volt Electric

BRANDS: Cat Lift Trucks, Mitsubishi, Jungheinrich and Big Joe

VERY NARROW AISLE/ SWIVEL MAST FORKLIFTS



3,000 - 5,500 lbs. Capacity - Side Shifter

Up to 258" Lift Height

42" - 72" Fork Length

LP Gas and Electric

BRANDS: Flexi

ATTACHMENTS

Carpet Pole Paper Roll Clamps Single Doubles Double Pallet Handler Carton Clamp Rotators Fork Positioners Multiple Load Handlers Push Pull Forks Clamps Layer Pickers Batteries Chargers

ELECTRIC COUNTERBALANCED FORKLIFTS



3,000 - 66,000 lbs. Capacity

Side Shifter

Up to 240" Lift Height

36 Volt/48 Volt Electric

BRANDS: Cat Lift Trucks, Mitsubishi and Jungheinrich

FLOOR CLEANERS



Scrubber dryers, sweepers, combi machines, carpet cleaners and more. Find the complete selection of the best floor cleaning machines here.

- Commercial & Industrial Floor Scrubbers
- Sweeper-Scrubbers
- Walk-behind & ride-on sweeper/scrubbers

NILFISK

ELECTRIC ORDER PICKERS & DOCK STOCKERS



2,200 - 4,500 lbs. Capacity

Up to 240" Lift Height

24 Volt/36 Volt/48 Volt Electric

BRANDS: Cat Lift Trucks, Mitsubishi, Jungheinrich and Big Joe

RAILCAR MOVERS



- Air-knife adverse weather rail drying system
- Anti-lock braking system
- . Dynamic traction control
- Exterior mounted cameras and cab monitor to view couplers & rail wheels
- Full width cab with rotating operator console
- Two air ride operator seats



ELECTRIC STRADDLE/WALKIE STACKERS



2,000 - 4,000 lbs. Capacity

Up to 194" Lift Height

Light or Heavy Duty

BRANDS: Big Joe

BAUMANN SIDELOADERS



6,600 lbs. - 130,000 lbs. Load Capacity

Fuel Options: LP, Diesel and Electric

Container handling options available.



MANUFACTURERS REPRESENTED

























RENT DAILY WEEKLY MONTHLY

Ring Power®

Jacksonville Tallahassee Ocala Gainsville Lake City St. Augustine	904.448.5438
Tampa St. Petersburg Sarasota Lakeland	727.471.2150
Orlando Osceola Daytona Brevard	407.857.1973



CRAWLER CRANES

LATTICE BOOM

100 - 400 Ton Capacity

Mounted on an undercarriage with a set of tracks for stability and mobility, crawler cranes can move around on a job site and perform lifts with little set-up and are capable of traveling with a load.





ALL-TERRAIN CRANES

100 - 400 Ton Capacity

With anywhere from two to seven axles, these mobile cranes combine the road-ability of truck mounted cranes with the maneuverability of rough terrain cranes, and can travel on public roads or on the job site using all-wheel and crab steering.





ROUGH TERRAIN CRANES

30 - 100 Ton Capacity

Mounted on an undercarriage with four rubber tires, rough terrain cranes are designed for pick-and-carry operations as well as off-road and "rough terrain" applications. Outriggers are used to level and stabilize the crane for hoisting.





TRUCK MOUNTED CRANES

50 - 115 Ton Capacity

Mounted on truck carriers for highway travel, truck mounted cranes require no special transport. Outriggers extend horizontally from the chassis and vertically to level and stabilize the crane for hoisting.





BOOM TRUCKS

22 - 60 Ton Capacity

Comprised of a telescoping crane boom mounted on a commercial truck body for easy transport, boom trucks are available with either stand-up or swing-seat controls.



NATIONAL CRANE



INDUSTRIAL CRANES

9 - 25 Ton Capacity

Designed for plant maintenance and material handling jobs, both indoors and out, industrial cranes are easy to operate, with features such as carry decks, dual fuel capabilities, and multi-mode steering.







MANUFACTURERS REPRESENTED














HEADQUARTERS & PRODUCTION FACILITY

8040 Philips Hwy. Jacksonville FL 32256

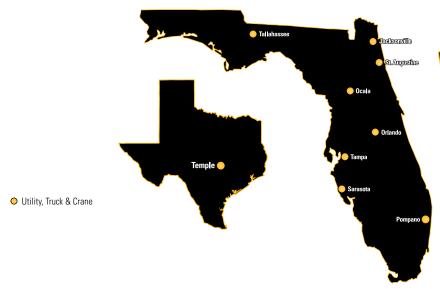

Charlotte Aiken Atlanta

12
LOCATIONS
Providing Utility, Truck & Crane Equipment

Providing Utility, Truck & Crane Equipment for your needs.

CUSTOMER PORTAL

CAN BE USED ON A MOBILE APP OR COMPUTER/DESKTOP

You have a powerful, digital tool to manage your rental business in an accessible, easy, and convenient way. You just have to use it!

Your Customer Portal Account allows you to:

- Manage your rental contracts and invoices
- Get fast, high-quality service
- Take full control of multiople jobsite activities
- View all your rentals and optimize your work



WHAT ARE YOU WAITING FOR?

Be part of the equipment rental digital era; use your CatRentalStore.com customer portal account now.









TOP 10 BENEFITS OF RENTING EQUIPMENT
























EQUIPMENT DIRECTORY DOWNLOAD

